


CES Plus Series: 24 kW, 27 kW, 36 kW | NEMA 3

Specifications

Model	CES Plus 24 kW, CES Plus 27 kW, CES Plus 36 kW
Phase	3-phase
Inlet/outlet pipe connection	3/4" female NPT
Heat exchanger material	316L stainless steel
Enclosure rating	NEMA 3 shown, NEMA 4/4X available
Operating pressure range	4-150 psi (0.27-10.3 bar)
Maximum temperature output	90 °F (32 °C)
Temperature adjustment range	60-90 °F (16-32 °C)
Temperature adjustment increment	1 °F (1 °C)
Number of heating elements	6
Minimum activation flow	1.25 gpm (4.7 l/m), DN 15 flowmeter
Maximum flow at 60 psi	13.2 gpm (50 l/m)

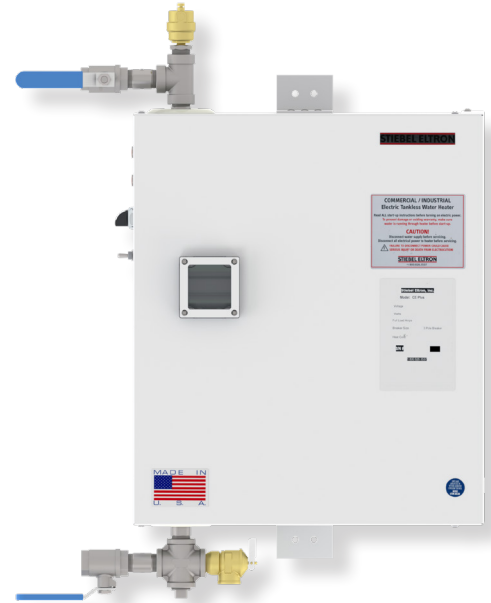

Model	Part Number	Voltage	Phase	kW	Amps	3P Breaker Size (A)	Temperature Rise °F				
							1 gpm	2 gpm	3 gpm	5 gpm	10 gpm
CES Plus 24 kW	CESPLUS-024-208	208	3-phase delta	22.53	62.55	70	>100	77	51	31	15
	CESPLUS-024-240	240	3-phase delta	25.00	60.14	70	>100	85	57	34	17
	CESPLUS-024-480	480	3-phase delta	25.00	30.07	35	>100	85	57	34	17
	CESPLUS-024-575	575	3-phase delta	24.00	24.10	30	>100	82	55	33	16
CES Plus 27 kW	CESPLUS-027-208	208	3-phase delta	27.04	75.06	80	>100	92	62	37	18
	CESPLUS-027-240	240	3-phase delta	27.02	65.01	80	>100	92	62	37	18
	CESPLUS-027-480	480	3-phase delta	27.02	32.51	40	>100	92	62	37	18
CES Plus 36 kW	CESPLUS-036-208	208	3-phase delta	36.00	99.93	110	>100	>100	82	49	25
	CESPLUS-036-240	240	3-phase delta	36.00	86.60	100	>100	>100	82	49	25
	CESPLUS-036-480	480	3-phase delta	36.00	43.30	50	>100	>100	82	49	25
	CESPLUS-036-575	575	3-phase delta	36.00	36.15	40	>100	>100	82	49	25




Certified to ANSI/UL Std. 499
Conforms to CAN/CSA
Std. C22.2 No.88




6 years against leakage /
2 years against defects in
workmanship & materials

rev. 4.2024 | Due to our continuous process of engineering and technological advancement, specifications may change without notice.

Temperature Rise vs. Flow Rate

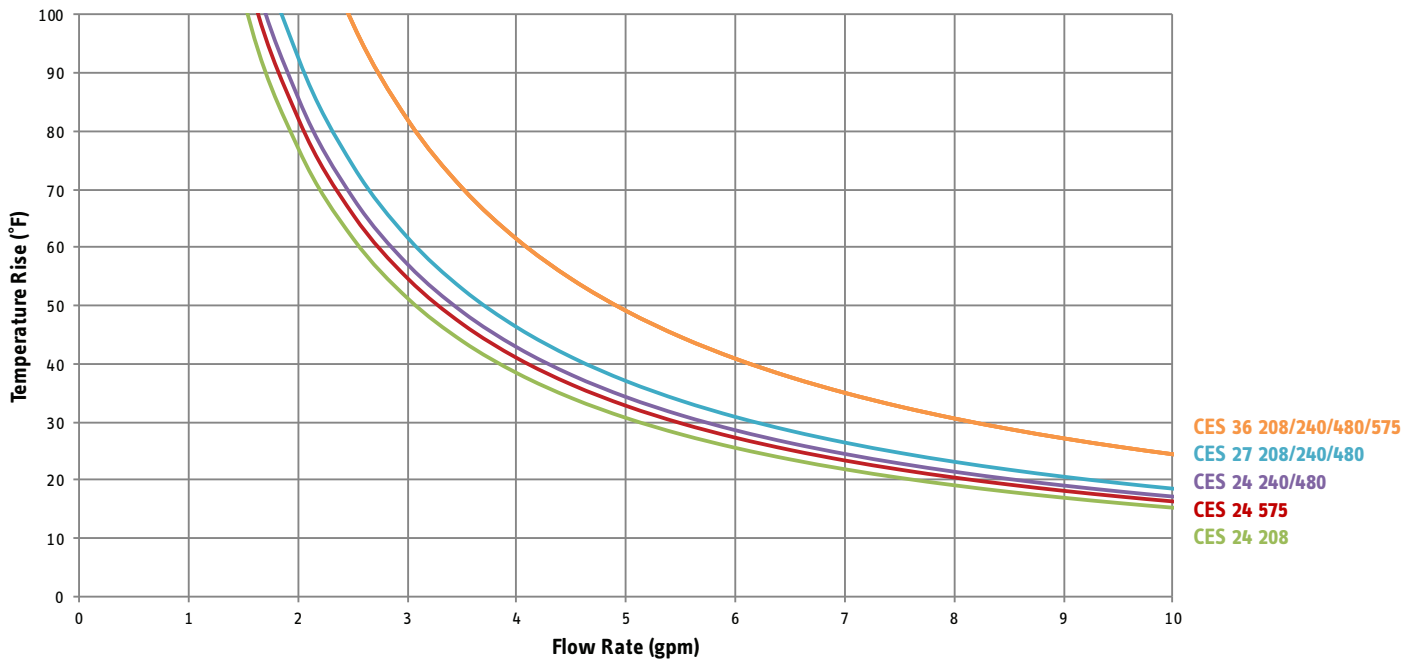

Pressure Drop vs. Flow Rate

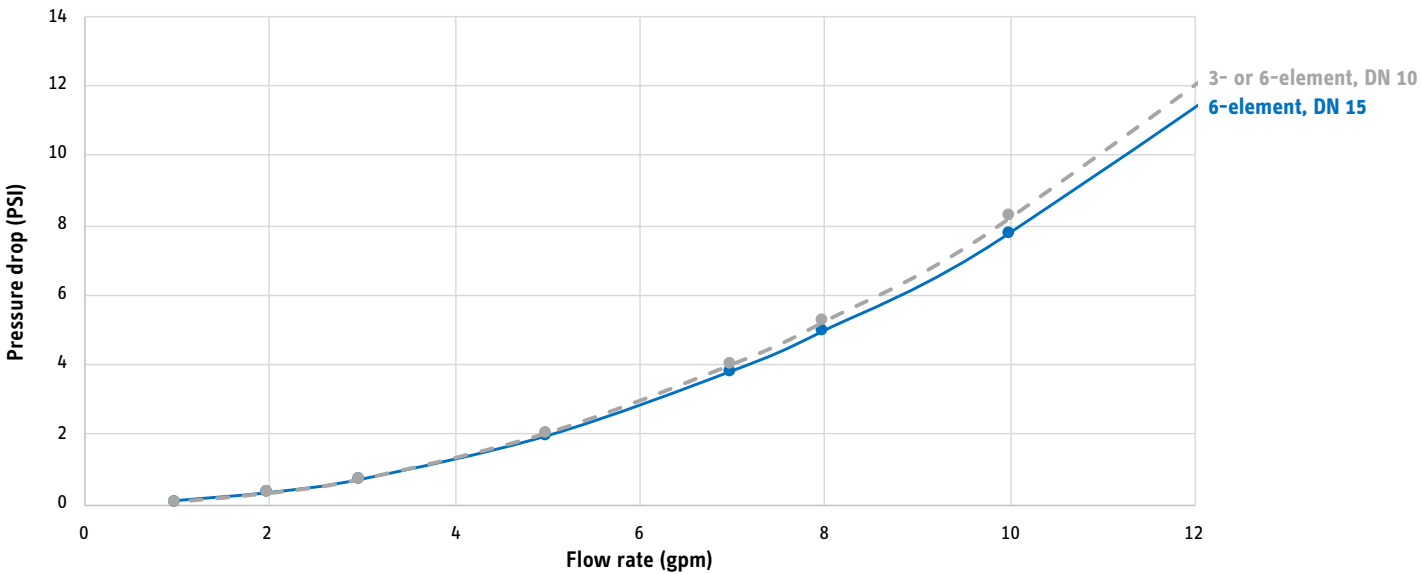

rev. 4.2024 Due to our continuous process of engineering and technological advancement, specifications may change without notice.