

## DHC Trend Single Sink Point-of-Use Sizing Guide

This guide shows possible point-of-use fixture or fixtures for use with each DHC. It is not intended for whole house sizing. Use actual achievable flow rates to determine if a particular model and size will deliver the temperature and flow rate required for the installed fixture.

### FIXTURES & FLOW RATES


SHOWING POSSIBLE MODEL SUITABILITY

TEMP. FOR MAX. FLOW RATE CALCULATION

**SINGLE LAV SINK**  
(Range 0.5-1.5)



90°F

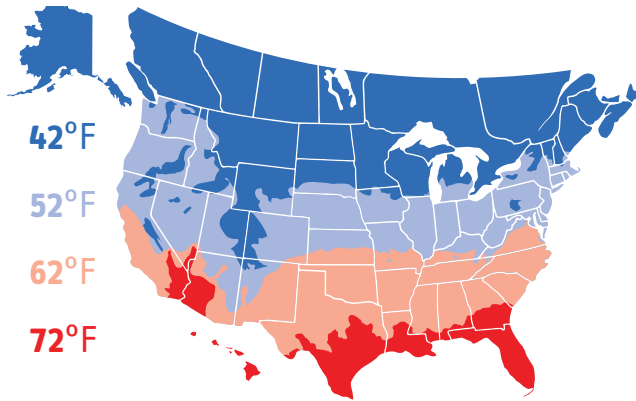

Recommendations are correct if unit is installed with 240 V service. Increase one model size if unit will be installed with 208 V service.

Call Stiebel Eltron at 800.582.8423 if you have any sizing questions, or if you have an out-of-the-ordinary situation. Stiebel Eltron service representatives can make recommendations on sizing, or provide assistance with our water heaters, to both homeowners and professional installers.

42°F

52°F

62°F

72°F

### DHC Trend 3/3.5-1 Min. activation 0.26 GPM

	42°F	52°F	62°F	72°F
<b>3.0 kW</b> MAX. FLOW RATE	0.43 GPM	0.54 GPM	0.73 GPM	1.14 GPM
RECOMMENDED FIXTURE TYPES				
<b>3.5 kW</b> MAX. FLOW RATE	0.47 GPM	0.59 GPM	0.81 GPM	1.25 GPM
RECOMMENDED FIXTURE TYPES				

### DHC Trend 4/6-2 Min. activation 0.26 GPM

	42°F	52°F	62°F	72°F
<b>3.8 kW</b> MAX. FLOW RATE	0.54 GPM	0.68 GPM	0.93 GPM	1.44 GPM
RECOMMENDED FIXTURE TYPES				
<b>6.0 kW</b> MAX. FLOW RATE	0.64 GPM	0.81 GPM	1.10 GPM	1.71 GPM
RECOMMENDED FIXTURE TYPES				

Scroll for more DHC Trend models ↓

## DHC Trend Single Sink Point-of-Use Sizing Guide

This guide shows possible point-of-use fixture or fixtures for use with each DHC. It is not intended for whole house sizing. Use actual achievable flow rates to determine if a particular model and size will deliver the temperature and flow rate required for the installed fixture.

### FIXTURES & FLOW RATES

SHOWING POSSIBLE MODEL SUITABILITY

TEMP. FOR MAX. FLOW RATE CALCULATION

**SINGLE LAV SINK**  
(Range 0.5-1.5)



90°F

**KITCHEN SINK**  
(Range 1.0-2.2)




120°F

**UTILITY/JANITOR'S SINK**  
(Range 1.0-2.2)



120°F

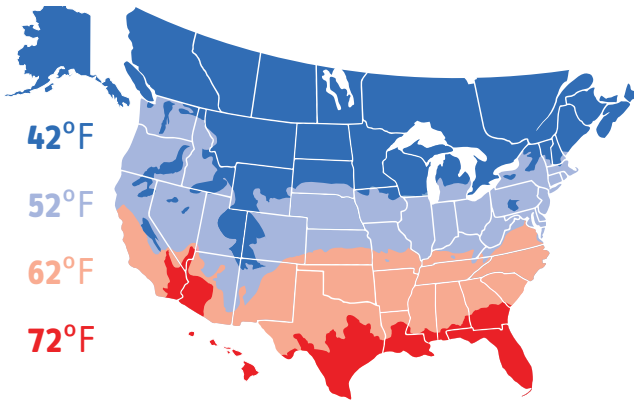

42°F

52°F

62°F

72°F

### DHC Trend 8/10-2 Min. activation 0.26 GPM

	42°F	52°F	62°F	72°F
<b>7.2 kW</b> MAX. FLOW RATE	0.68 GPM	0.86 GPM	1.17 GPM	1.82 GPM
RECOMMENDED FIXTURE TYPES				
<b>9.6 kW</b> MAX. FLOW RATE	0.85 GPM	1.08 GPM	1.46 GPM	2.28 GPM
RECOMMENDED FIXTURE TYPES				


### DHC Trend 12/15-2 Min. activation 0.26 GPM

	42°F	52°F	62°F	72°F
<b>12.0 kW</b> MAX. FLOW RATE	1.02 GPM	1.29 GPM	1.76 GPM	2.73 / 1.02 GPM
RECOMMENDED FIXTURE TYPES				
<b>14.4 kW</b> MAX. FLOW RATE	1.28 GPM	1.62 GPM	2.2 / 1.06 GPM	3.42 / 1.28 GPM
RECOMMENDED FIXTURE TYPES				

Scroll for temp rise charts. ↓

# DHC Trend Single Sink Point-of-Use Sizing Guide

Temperature Rise vs. Flow Rate at Max Rated Voltage

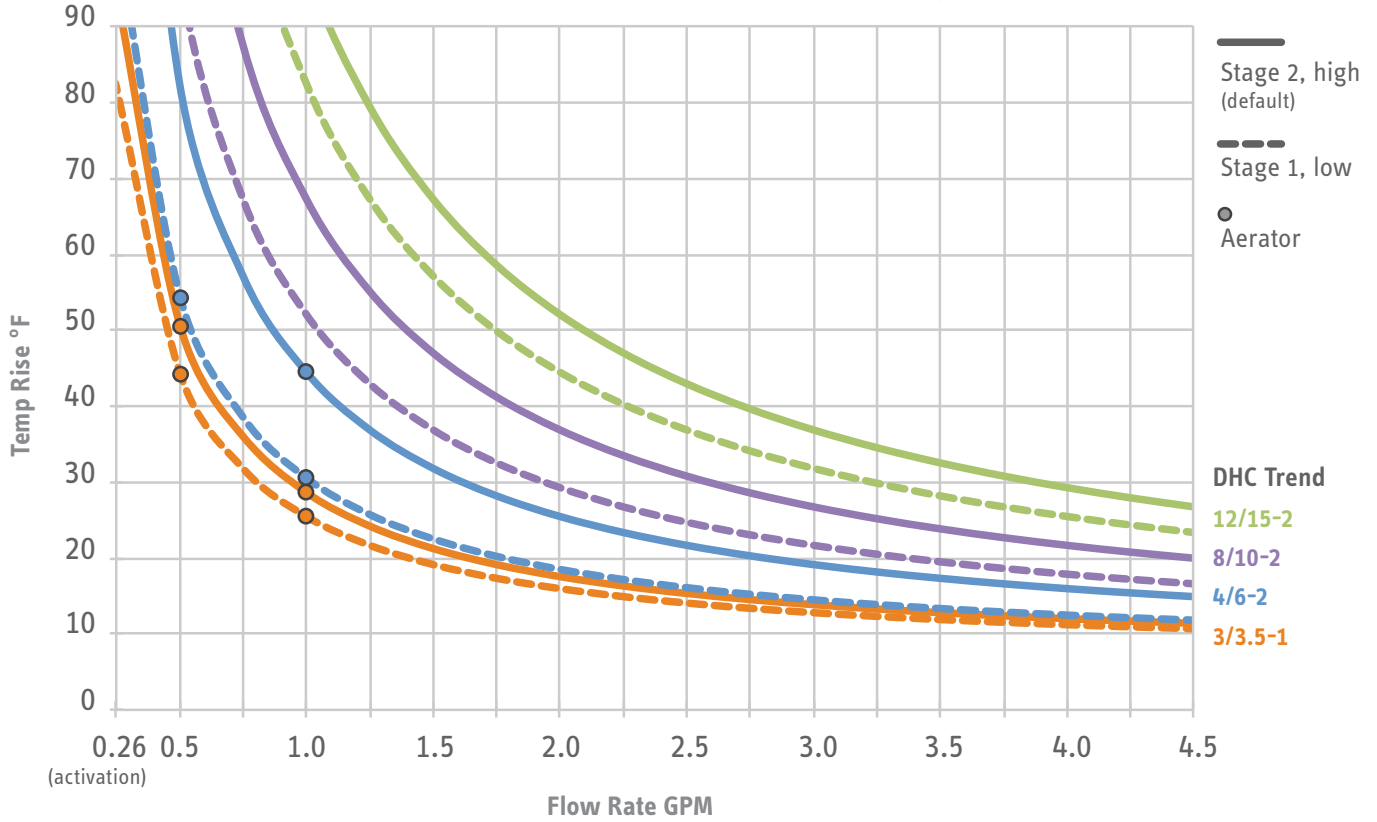

Temperature Rise vs. Flow Rate at 208 V

