
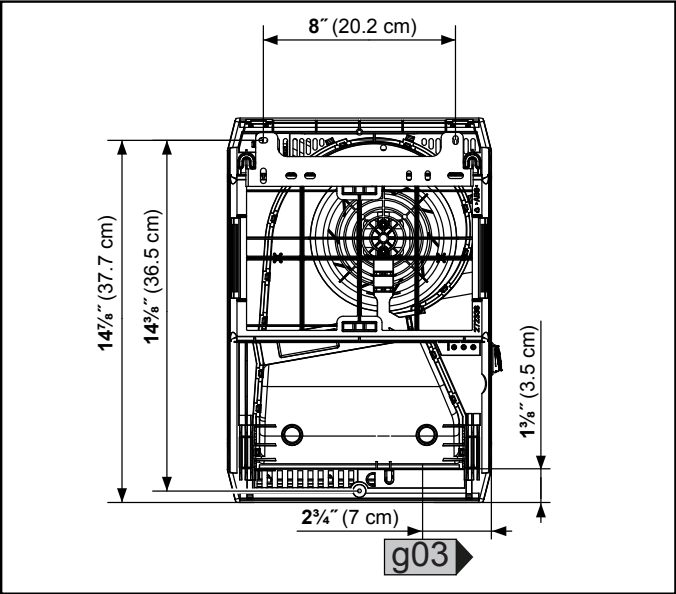


TECHNICAL SERVICE BULLETIN

Cord Lengths & Hard-Wire Knockout Positions for Room Heaters

120 V heater model	Power cord length
CK 150-1 Trend	47" (1.2 m)

CK 150-1 Trend

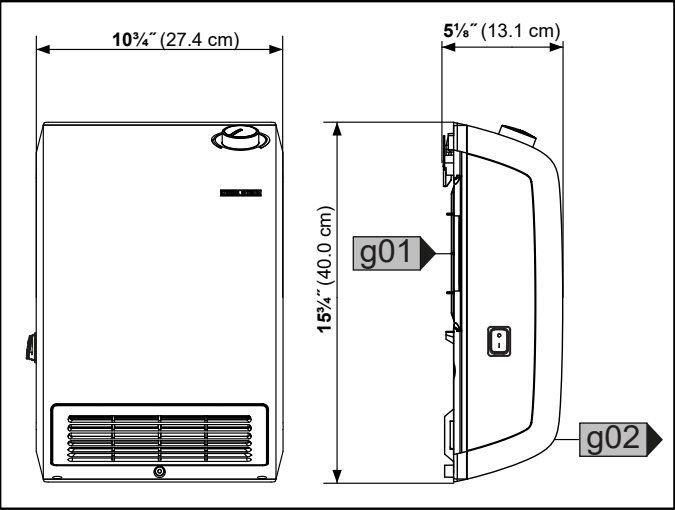


CK 150-1 Trend / CK 200-2 Trend	
g01	Air intake
g02	Air discharge
g03	Strain relief clamp / cable entry

TECHNICAL SERVICE BULLETIN

120 V heater model	Power cord length
CON 100-1, 150-1 Premium	59" (1.5 m)

CON Premium

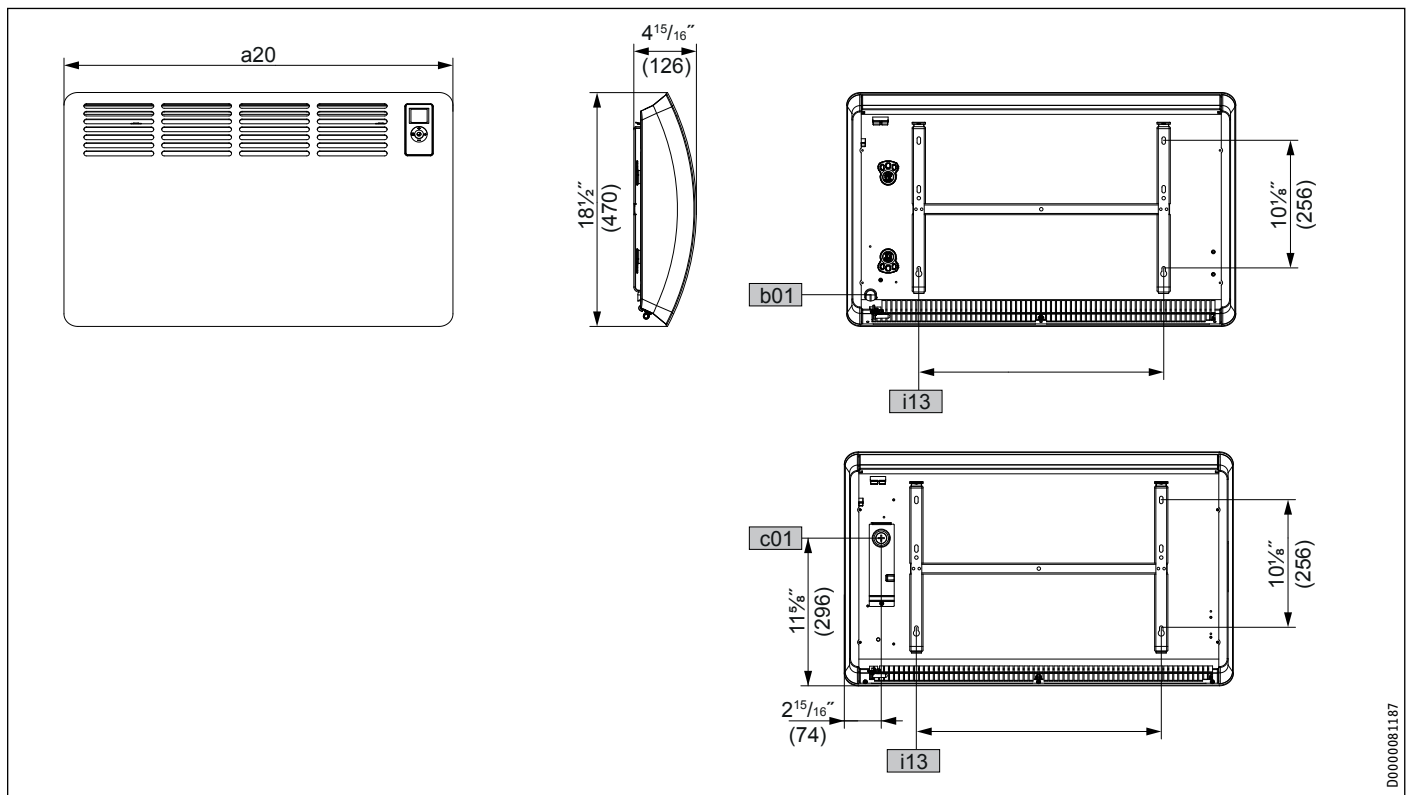


			CON 100-1 Premium CON 100-2 Premium	CON 150-1 Premium CON 150-2 Premium	CON 200-2 Premium	CON 300-2 Premium
a20	Heater	Width	18½" (470 mm)	24⅝" (625 mm)	30¾" (780 mm)	42⅞" (1090 mm)
b01	Power cord entry, 120 V models					
c01	Position of junction box knockout, hard-wired 208-240 V models					
i13	Wall mounting bracket	Horizontal hole spacing	7" (179 mm)	13¼" (335 mm)	19⅜" (491 mm)	31⅝" (803 mm)

TECHNICAL SERVICE BULLETIN

120 V heater model Power cord length

CNS 100-1 Trend, CNS 150-1 Trend/Plus 71" (1.8 m)

CNS Trend/Plus

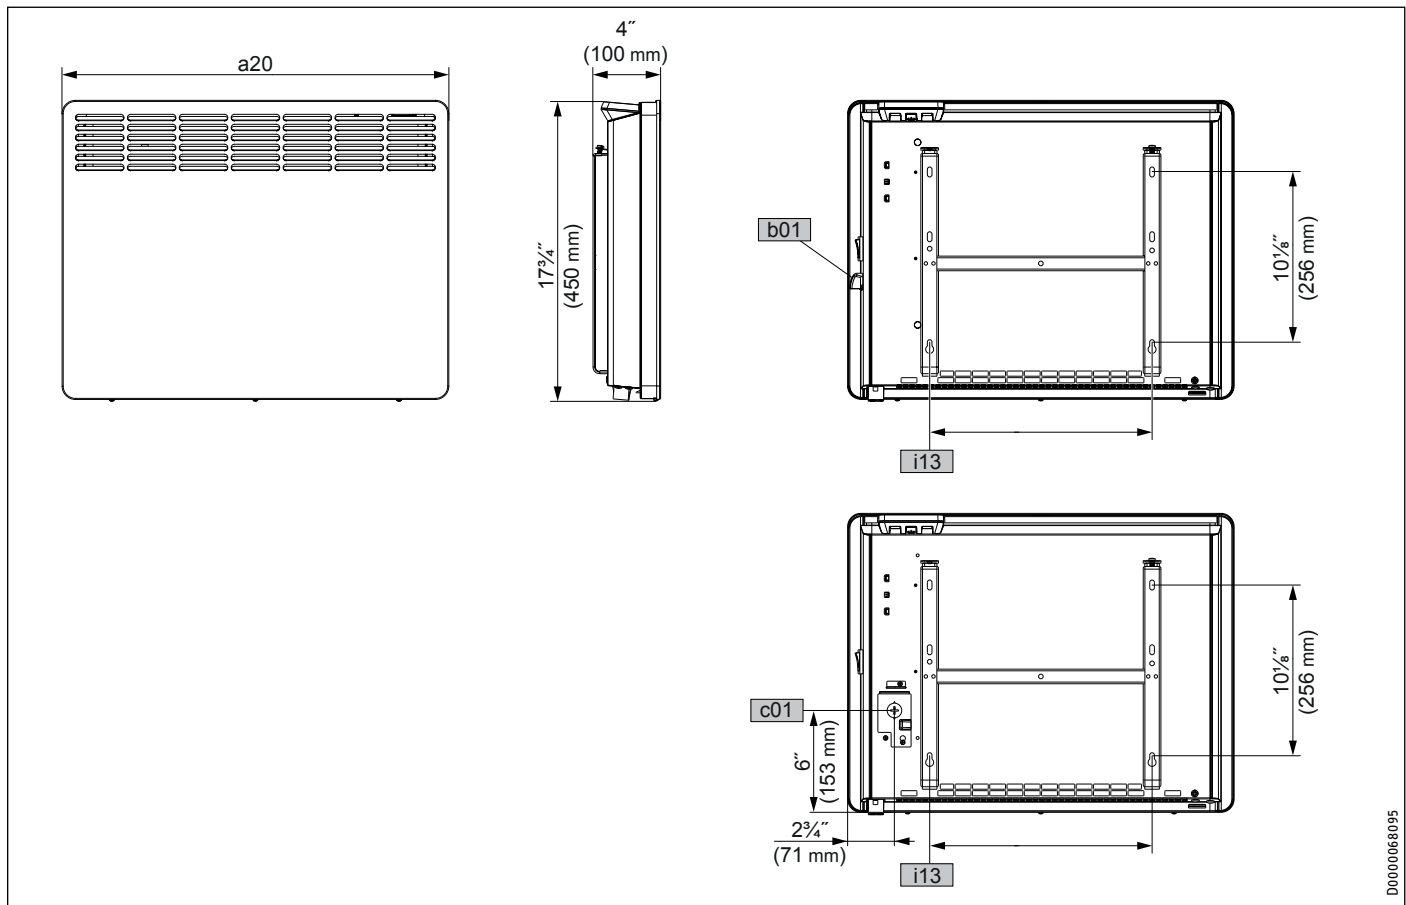

			CNS 100-1 Trend CNS 100-1 Plus CNS 100-2 Plus	CNS 150-1 Plus CNS 150-2 Trend CNS 150-2 Plus	CNS 200-2 Plus	CNS 300-2 Plus
a20	Heater	Width	16 3/4" (426 mm)	22 15/16" (582 mm)	29 1/16" (738 mm)	41 5/16" (1050 mm)
b01	Power cord entry, 120 V models					
c01	Position of junction box knockout, hard-wired 208-240 V models					
i13	Wall mounting bracket	Horizontal hole spacing	7 1/16" (179 mm)	13 3/16" (335 mm)	19 5/16" (491 mm)	31 5/8" (803 mm)